

Nothing else like it! A specially-formulated paint to meet the special conditions that exist only in swimming pools. The tough, tile-like film of this rubber-base paint stands up beautifully against the severe demands imposed by sun, water, chlorine and other chemicals. With proper preparation and application of the paint, it should last for two seasons – and, if used every year, will keep your pool clean and attractive indefinitely. Pays for itself time and again in easier maintenance and exciting beauty.

If there are any indications of scale or fungus growth, the area should be thoroughly washed with MARC Double Strength Descaler and then rinsed completely. If you have chipping or peeling, the area should be stripped with a paint stripper or sand blasted. Do not apply directly over any epoxy-based paint. Sandblast surface first. Do not use on wood, aluminum or fiberglass. Do not thin. Coverage is 200 to 300 square feet per gallon.

NOTE: MARC 83 Swimming Pool Paint should be allowed to dry for seven days prior to filling pool. For complete instructions on pool painting we recommend you contact your MARC representative to obtain a copy of the "SECRETS OF SUCCESSFUL POOL PAINTING" booklet.

Available in blue, white & black

VOC Content: Blue = 501 g/l  
White = 518 g/l Black = 508 g/l

PIGMENT:	<b>45.6%</b>	VEHICLE:	<b>54.4%</b>
Titanium Dioxide	35%	Pliolite Resin and	
Zinc Oxide .....	10%	Plasticizers .....	24%
Silicates .....	<b>55%</b>	Solvent .....	<b>76%</b>
	<b>100%</b>		<b>100%</b>

HMIS Ratings	Health	1	NFPA Ratings	
	Flammability	2		
	Reactivity	0		

Made in USA

Net Contents: 5 Gallons

**MARC**



# SWIMMING POOL PAINT


Blue  White

- Rubber-base paint resists effects of water and chemicals
- Dries quickly, bonds tightly to concrete, masonry and steel
- Has been used successfully in every section of the country and under all climatic conditions
- Makes pool cleaning easier, adds striking beauty



An Exclusive Formula of **M-83**

MID-AMERICAN RESEARCH CHEMICAL CORP.  
P. O. BOX 927 COLUMBUS, NE 68602-0927  
800-228-8508

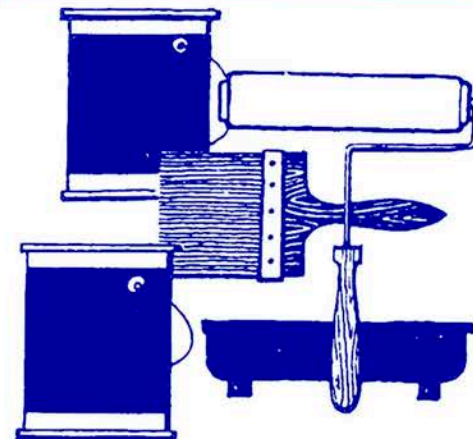

**DANGER:** Contains petroleum distillates. Flammable liquid and vapor. May be fatal if swallowed and enters airways. Causes skin irritation. May cause cancer. Suspected of damaging fertility or the unborn child. Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat, sparks, open flames and hot surfaces – No Smoking. Keep container tightly closed. Ground container and receiving equipment. Use explosion-proof equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Wash thoroughly after handling. Wear protective gloves and eye protection. Use other protective equipment as required. IF SWALLOWED: Do NOT induce vomiting. Immediately call a Poison Center or physician. IF ON SKIN (or hair): Remove immediately all contaminated clothing. Rinse skin with water, and then wash with soap and water. If skin irritation occurs: Get medical attention. If exposed or concerned: Get medical attention. If case of fire: Use foam, carbon dioxide or dry chemical to extinguish. Store locked up in a cool, well-ventilated place. Dispose of in accordance with local, state and federal regulations. KEEP OUT OF REACH OF CHILDREN! HMIS/NFPA Ratings: Health-2, Flammability-2, Reactivity-0.

RM0715