

FEATURES


MARC Energizer Lift Station Degreasing Aid helps to ensure optimum performance in lift stations by inhibiting the adhesion of grease and slime to the sidewalls of lift stations. This allows lift stations to work more efficiently, makes cleaning easier and keeps them cleaner longer. MARC Energizer Lift Station Degreasing Aid penetrates and emulsifies greases, oils, slime and other deposits to help break them up and allow other treatments like a floating lift station degreaser such as MARC 266 to handle more material. In addition, by being a wetting agent, MARC Energizer Lift Station Degreasing Aid is able to reduce clumping of solids. If used in conjunction with a bacteria/enzyme treatment program such as MARC 64 HC Bacterial Enzymes, MARC 77 Micro-Zyme, MARC 89 Enzyme Blocks or MARC 250 Super-Zyme, it will enhance the bacterial action by making it easier for the bacteria and enzymes to attack organic matter. Regular, weekly use of MARC Energizer Lift Station Degreasing Aid after a thorough clean out of the lift station, such as after using MARC 55 Liquid Organic Sewer Aid, MARC 59 Fireball granular sewer solvent or MARC 76 Xtreme granular sewer solvent, is ideal in helping to keep the lift station walls free from greasy buildups. MARC Energizer Lift Station Degreasing Aid can be used in conjunction with any other lift station treatment. It is biodegradable.

MARC 

ENERGIZER

LIFT STATION DEGREASING AID

A Weekly Treatment for All Lift Stations

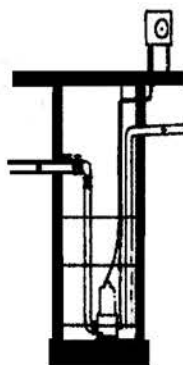

Inhibits Grease Adhesion
Penetrates Grease and Deposits
Serves as a Wetting Agent • Emulsifies
Facilitates Bacterial Activity
Raspberry Fragrance


Net Contents: 1 Gallon (3.79 l)

An Exclusive Formula of **M-94**

MID-AMERICAN RESEARCH CHEMICAL CORP.
P. O. BOX 927 · COLUMBUS, NE 68602-0927 · 800-228-8508

DIRECTIONS FOR USE

For MARC Energizer Lift Station Degreasing Aid to be most effective, it is important that the proper amount be added weekly. For smaller lift stations (under six feet in diameter), add 1/2 gallon weekly. For moderately-sized lift stations (six to ten feet in diameter), add 1 gallon weekly. For large lift stations (over ten feet in diameter), add 1 1/2 to 2 gallons weekly. In cases of heavy buildups or overloaded lift stations, add a larger quantity of MARC Energizer Lift Station Degreasing Aid or add more frequently.

WARNING: Contains surfactant blend. Causes serious eye irritation. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention. Do not take internally. **KEEP OUT OF REACH OF CHILDREN!** 

HMIS/NFPA Ratings: Health-0,
Flammability-0, Reactivity-0.

RM0515