




PENETRATING HI-TACK CLEAR LUBE

EFFECTIVE FROM
-30°F TO +500°F

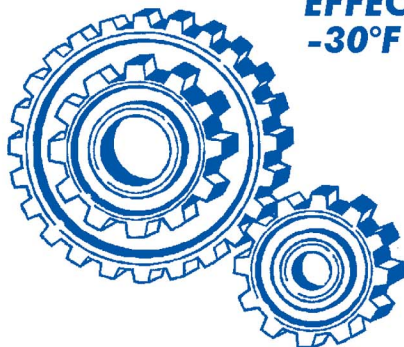

High Tack
Safe on Most Plastic

DANGER: EXTREMELY FLAMMABLE.
HARMFUL OR FATAL IF SWALLOWED.
MAY CAUSE EYE AND SKIN IRRITATION.
CONTENTS UNDER PRESSURE.
SEE OTHER CAUTIONS ON BACK PANEL.

NET WT. 12 OZ (340 g)

M-147

**MID-AMERICAN RESEARCH
CHEMICAL CORP.**
P.O. BOX 927 • COLUMBUS, NE 68602-0927

PENETRATING HIGH TACK FORMULA

A high tack, clear, lubricating gel which provides lubrication at temperatures from -30°F to +500°F. Penetrates as an oil to lubrication point, then forms into a tacky grease-like gel. Deposits a fine polytetrafluoroethylene and gel lubricant mixture deep inside working parts. Resists water washout and weathering. Prevents rust and corrosion while covering surfaces with a moisture proof barrier film. Safe on most plastics.

USE ON:

Gears, sprockets, hinges, chains, cable, wire rope, slides, valves, pistons, rings, seals, bearings, sleeves, cams and bushings.

USED BY:

Machine shops, light and heavy manufacturing, HVAC, plumbing and other trades. Automotive and virtually all maintenance or repair operations.

DIRECTIONS:

SHAKE WELL BEFORE USING.

Remove cap and rotate actuator until orifice is pointed toward mark on valve cup. Spray holding can 12 to 14 inches away from surface to be treated. For hard to reach areas, insert extension tube into actuator orifice.

PENETRATING HI-TACK CLEAR LUBE

Danger: Extremely flammable aerosol. Causes serious eye irritation. May cause drowsiness or dizziness. May be fatal if swallowed and enters airways. Keep away from heat/sparks/open flames/hot surfaces. No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Avoid breathing gas. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear eye/face protection. Store in a well-ventilated place. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 49°C/120°F. Dispose of contents/container in accordance with local/regional/national/international regulations.

First Aid: IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if you feel unwell. IF ON SKIN: Take off immediately all contaminated clothing. Rinse skin with water/shower. Get medical attention if irritation develops and persists. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention. IF SWALLOWED: Immediately call a poison center/doctor. Do NOT induce vomiting.

Contains Acetone (67-64-1), Aliphatic Petroleum Solvent (64742-89-8), Lubricant Base Oil (Mixture), Petroleum distillates, hydrotreated light (64742-47-8) and Carbon Dioxide (124-38-9)

Distributed by:
MID-AMERICAN RESEARCH
CHEMICAL CORP.
P.O. Box 927
Columbus, NE 68602-0927
402-564-7104



Caution: Intentional misuse by concentrating and inhaling the product can be harmful or fatal. KEEP OUT OF REACH OF CHILDREN.

See Safety Data Sheet for complete safety information.

CONTAINS NO OZONE
DEPLETING CHEMICALS!

HMIS® RATING:	
HEALTH	1
FLAMMABILITY	3
PHYSICAL HAZARD	0
PERSONAL PROTECTION	X



MADE IN THE
U.S.A.