

PENETRATING HIGH TACK FORMULA

A high tack, clear, lubricating gel which provides lubrication at temperatures from -30°F to +500°F. Penetrates as an oil to lubrication point, then forms into a tacky grease-like gel. Deposits a fine polytetrafluoroethylene and gel lubricant mixture deep inside working parts. Resists water washout and weathering. Prevents rust and corrosion while covering surfaces with a moisture proof barrier film. Safe on most plastics.

USE ON:

Gears, sprockets, hinges, chains, cable, wire rope, slides, valves, pistons, rings, seals, bearings, sleeves, cams and bushings.

USED BY:

Machine shops, light and heavy manufacturing, HVAC, plumbing and other trades. Automotive and virtually all maintenance or repair operations.

DIRECTIONS:

SHAKE WELL BEFORE USING.

Remove cap and rotate actuator until orifice is pointed toward mark on valve cup. Spray holding can 12 to 14 inches away from surface to be treated. For hard to reach areas, insert extension tube into actuator orifice.

PENETRATING HI-TACK CLEAR LUBE

DANGER: Extremely flammable aerosol. May be fatal if swallowed and enters airways. Causes serious eye irritation. May cause drowsiness or dizziness. Keep away from heat/sparks/open flames/hot surfaces. No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Avoid breathing mist or vapor. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear eye protection/face protection. Store in a well-ventilated place. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 49°C/120°F. Dispose of contents/container in accordance with local/regional/national/international regulations.

FIRST AID: IF SWALLOWED: Immediately call a poison center/doctor. Do NOT induce vomiting. **IF INHALED:** Remove person to fresh air and keep comfortable for breathing. Call a poison center/doctor if you feel unwell. **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention. **IF ON SKIN:** Wash off with soap and water. Get medical attention if irritation develops and persists.

CONTAINS (CAS#): Acetone (67-64-1), Distillates (Petroleum), Hydrotreated Light, (64742-47-8), Methyl Acetate (79-20-9), Carbon Dioxide (124-38-9), Naphtha, (Petroleum), Hydrotreated Light (64742-49-0) and n-Heptane (142-82-5).

Distributed by:
**MID-AMERICAN RESEARCH
CHEMICAL CORP.**
P.O. Box 927
Columbus, NE 68602-0927
402-564-7104



CAUTIONS: Intentional misuse by concentrating and inhaling the product can be harmful or fatal.

WARNING: This product can expose you to chemicals including Ethyl Benzene, which is known to the State of California to cause cancer, and Toluene, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

KEEP OUT OF REACH OF CHILDREN.

See Safety Data Sheet for complete safety information.

24 HOUR MEDICAL EMERGENCY: 1-866-836-8855



MADE IN THE
U.S.A. with
globally sourced
materials.




PLEASE RECYCLE
WHEN EMPTY

R09-20

MARC

PENETRATING HI-TACK CLEAR LUBE

**EFFECTIVE FROM
-30°F TO +500°F**

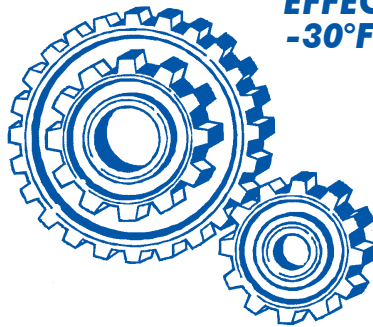

**High Tack
Safe on Most Plastic**

**DANGER: EXTREMELY FLAMMABLE.
HARMFUL OR FATAL IF SWALLOWED.
MAY CAUSE EYE IRRITATION.
CONTENTS UNDER PRESSURE.
SEE OTHER CAUTIONS ON BACK PANEL.**

NET WT. 12 OZ (340 g)

M-147

**MID-AMERICAN RESEARCH
CHEMICAL CORP.**

P.O. BOX 927 • COLUMBUS, NE 68602-0927