

A high tack, clear, lubricating gel which provides lubrication at temperatures from -30°F to 600°F. Penetrates as an oil to lubrication point, then forms into a tacky grease-like gel. Deposits a fine polytetrafluoroethylene and gel lubricant mixture deep inside working parts. Resists water washout and weathering. Prevents rust and corrosion while covering surfaces with a moisture proof barrier film. Safe on most plastics.

USE ON:

Gears, sprockets, hinges, chains, cable, wire rope, slides, valves, pistons, rings, seals, bearings, sleeves, cams and bushings.

USED BY:

Machine shops, light and heavy manufacturing, HVAC, plumbing and other trades. Automotive and virtually all maintenance or repair operations.

**DIRECTIONS:
SHAKE WELL BEFORE USING**

Remove cap and rotate actuator until orifice is pointed toward mark on valve cup. Spray holding can 12 to 14 inches away from surface to be treated. For hard to reach areas, insert extension tube into actuator orifice.

DANGER: Flammable Aerosol. Contains gas under pressure; may explode if heated. May be fatal if swallowed and enters airways. Causes skin and serious eye irritation. May cause drowsiness or dizziness. May cause respiratory irritation. Keep away from heat, sparks, open flames, and hot surfaces. -No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F. Store in a well-ventilated place. Wash hands thoroughly after handling. Wear protective gloves and eye protection. If on skin: Wash with plenty of water. If skin irritation occurs: Get medical attention. Take off contaminated clothing and wash before reuse. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention. Avoid breathing fumes, mist, vapors and spray. Use only outdoors or in a well-ventilated area. If inhaled: Remove person to fresh air and keep comfortable for breathing. Call a poison center or doctor if you feel unwell. If swallowed: Immediately call a poison center or doctor. Do NOT induce vomiting. Dispose of contents and container in accordance with local, state, and national regulations.



CONTAINS (CAS#): Petrolatum (8009-03-8), Acetone (67-64-1), Methyl Acetate (79-20-9), Petroleum distillates, hydrotreated light (64742-47-8), Heptane (142-82-5).

CAUTIONS: Intentional misuse by concentrating and inhaling the product can be harmful or fatal.

KEEP OUT OF REACH OF CHILDREN

See Safety Data Sheet for complete safety information.
24 HOUR MEDICAL EMERGENCY: 1-866-836-8855

HMIS RATING:	
HEALTH	1
FLAMMABILITY	3
REACTIVITY	0
PERSONAL	B



MADE IN THE
U.S.A.




PLEASE RECYCLE
WHEN EMPTY

R05-23



TOUGH TAC CLEAR LUBE

**EFFECTIVE FROM
-30°F TO 600°F**

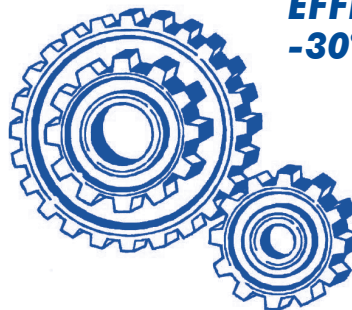

**Tough Tac is
Safe on Most Plastics**

**DANGER: FLAMMABLE AEROSOL.
CONTAINS GAS UNDER PRESSURE.
MAY EXPLODE IF HEATED.
SEE OTHER CAUTIONS ON BACK PANEL.**

NET WT. 14 OZ. (397g)

M-147

MID-AMERICAN RESEARCH CHEMICAL CORP.
P.O. BOX 927 • COLUMBUS, NE 68602-0927
800-228-8508