


DANGER: Contains petroleum distillates and dipentene. Flammable liquid and vapor. Causes skin irritation. May cause an allergic skin reaction. Causes eye irritation. May be fatal if swallowed and enters airways. Harmful if inhaled. May cause drowsiness or dizziness. Causes damage to organs through prolonged or repeated exposure. Do not take internally. Keep away from heat, sparks, open flames and hot surfaces. No smoking. Keep container tightly closed. Use explosion-proof equipment. Use only non-sparking tools. Take precautionary measures against static discharge. Do not breathe mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only in a well-ventilated area. Wear protective gloves and eye protection. If on skin or hair: Immediately take off all contaminated clothing. Rinse skin and hair with water. Wash contaminated clothing before reuse. If swallowed: Immediately call a physician. Do NOT induce vomiting. In inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical attention. Call a poison center or doctor if you feel unwell. If skin irritation or rash occurs: Get medical attention. If eye irritation persists: Get medical attention. In case of fire: Use water fog, foam dry chemical or carbon dioxide to extinguish. Store locked up in a cool, well-ventilated area. Dispose of in accordance with federal, state and local regulations. **Keep Out of Reach of Children!** MADE IN USA.



GREASE TRAP CONDITIONER

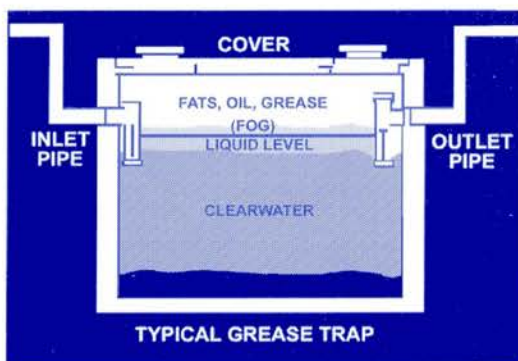

- Dissolves Grease and Slime
- Eliminates Odors
- Fast Acting
- Natural Pine Solvent Base

An Exclusive Formula of

M-255-PT

MID-AMERICAN RESEARCH CHEMICAL CORP.
P. O. BOX 927 · COLUMBUS, NE 68602-0927 · 800-228-8508

DIRECTIONS FOR USE

Add a sufficient amount of **MARC Grease Trap Conditioner PT** to provide at least a one inch layer of product on the surface of the grease trap. Sixteen fluid ounces (1 pint) will initially treat 32 square inches of surface area. Pour into drain nearest the grease trap, or add directly to the trap. Add one pint per week thereafter. Large grease traps and those subject to heavy loads of grease, fats and oils will require larger and more frequent additions of **MARC Grease Trap Conditioner PT**. If grease trap has a large build-up, clean out manually before adding product. Regular use of **MARC Grease Trap Conditioner PT** will normally eliminate manual cleaning.

HMIS/NFPA Ratings: Health-2,
Flammability-2, Reactivity-0.



Net Contents: 5 Gallons

RM0715