

## FEATURES

**MARC Once Over** is a high-performance stripper for fast and effective removal of floor finishes and waxes. It is designed to quickly and easily strip multiple layers of "burnished in" finish. Its high level of active ingredients allows it to "wet" the floor, penetrate the finish and emulsify it for quick removal.

**MARC Once Over** may be used with a mop, wet vac or auto-scrubber. It contains no ammonia, caustic soda, caustic potash or alkaline builders, so it does not leave a highly alkaline residue which can interfere with finish application. If picked up properly, just rinse with MARC 245 Neutralizing Agent and fresh water.


**DANGER!** Contains monoethanolamine, 2-butoxyethanol and nonylphenol ethoxylate. Causes severe skin burns and serious eye damage. May cause respiratory irritation. Harmful if swallowed. Stripped floor may be extremely slippery. **PRECAUTIONARY**

**STATEMENTS:** Do not breathe the mist or vapors. Do not kneel in stripper solution. Wash hands, face and any skin contact thoroughly after handling. Wear protective gloves, protective clothing, eye protection and face protection. Use only in a well-ventilated area. **IF SWALLOWED:** Rinse mouth. Do NOT induce vomiting. **IF ON SKIN** (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower. Wash contaminated clothing before reuse. **IF INHALED:** Remove person to fresh air and keep comfortable for breathing. **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or doctor/physician. Keep container tightly closed. Store locked up in a well-ventilated area. Dispose of in an approved waste disposal facility. **KEEP OUT OF REACH OF CHILDREN!**



**Net Contents: 5 Gallons**

**MARC** 

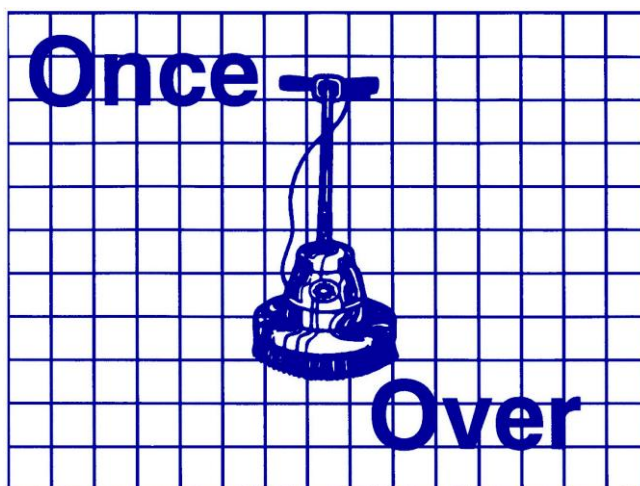

## HIGH PERFORMANCE FLOOR FINISH STRIPPER

- Highly Active
- Fast-Acting
- Low Foam
- Easily Removes Heavy Buildups
- Saves Time and Labor

An Exclusive Formula of **M-272**

MID-AMERICAN RESEARCH CHEMICAL CORP.  
P. O. BOX 927 · COLUMBUS, NE 68602-0927 · 800-228-8508

## DIRECTIONS FOR USE

Normal Stripping: Mix 1-part **MARC Once Over** in 12-parts water (10 ounces per gallon). Use hot water for best results.

Heavy-Duty Stripping: Mix 1-part **MARC Once Over** in 4-parts of water (1 quart per gallon). For extra heavy buildups, dilute 1:3 (1 quart in 3 quarts of water).

Machine Stripping: Dilute 1-part **MARC Once Over** in 12 to 16-parts of water (8 to 10 ounces per gallon).

**NOTE:** Stripper may affect some floors, especially asphalt or highly colored tile. Test on a small hidden area first.

Mop the solution uniformly on the floor over a workable area of about 100 to 200 square feet. Allow stripper to work about 5 to 10 minutes. Do not allow solution to dry on floor or leave it on floor longer than necessary.

Thoroughly remove solution and old, emulsified finish with a wet vac, clean mop or auto-scrubber. Failure to completely pick up solution may result in poor finish appearance. To ensure removal, rinse floor with water, using MARC 245 Neutralizing Agent in the final rinse. Allow floor to dry completely before applying floor finish.

HMIS/NFPA Ratings: Health-2, Flammability-0, Reactivity-0.

**FOR INDUSTRIAL AND  
INSTITUTIONAL USE ONLY!**

**MADE IN USA**

R0220